

TECHNICAL DATA SHEET

CABLE/ PIPE CLIPS WITH SCREW


tillex®

Plastmaterial:

High impact elastic polypropylene - halogen free and UV-stabilized.

Screw:


Strong concrete screw, Corrosion Class C4, PH2. Can be installed both indoors and outdoors.



INSTALLATION

- For concrete and tile: screw directly into 4 mm hole - no plug required.
- For 13 mm single-layer plasterboard: mount using yellow plug (KP yellow).
- For double-layer plasterboard - no plug required. If screw "goes over", mount using yellow plug (KP yellow) in the created hole.
- For 13 mm single-layer plasterboard on metal profile - no plug required.
- For wood, fibreboard and plywood: screw directly into material.
- For aerated concrete: mount using yellow plug (KPyellow). For densities above 600, screw directly into concrete.

DIMENSIONS

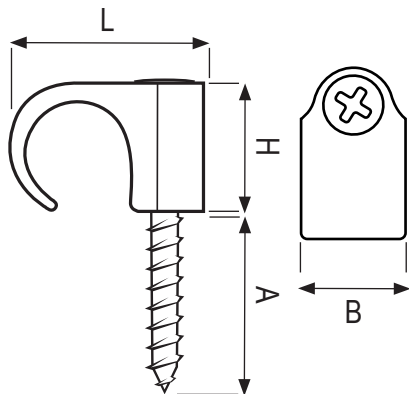

PRODUCT RANGE (XXL BUCKET)



Ref. nr.	Type	Screw PH2	Colour	Dim.L, mm	Dim. B, mm	Dim. H, mm	Dim. A, mm	Pieces/box	Drill Ø
170117	SC C4 14-18 W	5x40	white	23,7	14,1	16,6	22,5	1500	4 mm
170131	SC C4 14-18 G	5x40	grey	23,7	14,1	16,6	22,5	1500	4 mm
170216	SC C4 18-22 W	5x45	white	27,5	14,4	21,3	22,5	1000	4 mm
170254	SC C4 18-22 G	5x45	grey	27,5	14,4	21,3	22,5	1000	4 mm



Ref. nr.	Type	Screw T20	Colour	Dim.L, mm	Dim. B, mm	Dim. H, mm	Dim. A, mm	Pieces/box	Drill Ø
180215	SC C4 14-18 W	5x40	white	23,7	14,1	16,6	22,5	1500	4 mm
180222	SC C4 14-18 G	5x40	grey	23,7	14,1	16,6	22,5	1500	4 mm
180246	SC C4 18-22 W	5x45	white	27,5	14,4	21,3	22,5	1000	4 mm
180253	SC C4 18-22 G	5x45	grey	27,5	14,4	21,3	22,5	1000	4 mm